Original Composites & Fiberglass

ARCOTEX® 5326

Composite resin synergy

ARcoteX® 5326 has been specifically developed to be used with polyester and vinylester resins in corrosion-resistant applications.

- Produced with Cem-FIL® AR-glass chemistry, ARcoteX® fibers are designed for composite reinforcement.
- High elastic modulus and tensile strength provide effective reinforcement.
- ARcoteX® 5326 roving is treated with silane-based coupling agents, which allow a high level of performance to be obtained with resins and hardener systems in general use.
- Designed to be highly resistant to corrosion in both acid and alkali environments.

FOR FILAMENT WINDING AND PULTRUSION APPLICATIONS

Product Benefits

Performance

- Corrosion-resistant glass
- Excellent performance in both acid and alkali media
- No static electricity

Processing

- Excellent unwinding
- Low level of fuzz
- Excellent wet-out characteristics

Application

ARcoteX® 5326 is designed mainly for use in filament winding and pultrusion, but is also suitable for weaving applications.

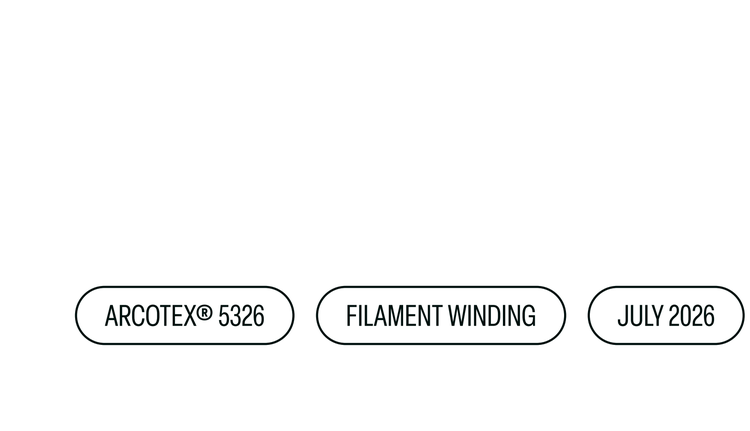

ARCOTEX® 5326 | FILAMENT WINDING | JULY 2026

Technical Characteristics

LINEAR DENSITY OF ROVING (TEX) (ISO 1889:2009)	FILAMENT DIAMETER (µm) (ISO 1888)	LOSS ON IGNITION (%) (ISO 1887:1995)	MOISTURE (%) (ISO 3344:1997)
600	19	0.80	0.30 max
1200	19	0.80	0.30 max
2400	27	0.80	0.30 max

- Direct Roving
- Electrical Conductivity: Very low
- Specific Gravity: 2.68 g/cm^3
- Material: Alkali-resistant glass*
- Softening Point: 860 ºC–1 580 ºF
- Chemical Resistance: Very high
- Modulus of Elasticity: 72 GPa — 10 x 10^6 psi
- Tensile Strength: >1 000 MPa —>145 x 10^3 psi

*Our fibers are manufactured with high zirconia content in compliance with ASTM C1666/C1666/M-07 and EN 15422 and under the recommendations of PCI and GRCA.

Packaging & Storage

ARcoteX® 5326 rovings are protected by a shrink-wrap polythene film, open at the top, which should not be removed when the product is in use. Rovings are packed on pallets. ARcoteX® 5326 rovings should be stored away from heat and moisture, and in their original packaging. Optimum conditions are temperatures between 15 °C and 35 °C and humidity between 35% and 65%. If the product is stored at lower temperatures, it is advisable to condition it in the workshop for at least 24 hours before use, to prevent condensation.

Quality Standards

- ARcoteX® 5326 fibers are manufactured under a Quality Management System approved to ISO 9001.
- Cem-FIL® fibers are not classified as dangerous by the Regulation 1272/2008/EC. For more information, please refer to our Safe Use Instruction Sheet.
- CE marking and Declaration of Performance as fibers for use in concrete and mortar through European Technical Assessment ETA 17/0169 for 320 to 1200 tex.
- Verified Environmental Product Declaration according to ISO 14025 and EN 15804:2019 available upon request.

MAKE MORE POSSIBLE™

US & Canada
2790 Columbus Road
Building 70
Granville, Ohio, USA 43023
+1 866 2GET GLAS

Europe (France)
767 Quai Des Allobroges
Chambery
Rhone-Alpes 73000, France
+33 4 79 75 55 52

China
Room 301C+304,
1188 Minsheng Road,
Pudong, Shanghai
201705, China
+86 21 8010 3596

This information and data contained herein is offered solely as a guide in the selection of product. We do not guarantee its applicability to the user's process or assume any responsibility or liability arising out of its use or performance. The physical and chemical properties of this product represent typical, average values obtained in accordance with stated test methods and are subject to normal manufacturing variations. The user agrees to be responsible for thoroughly testing any application of the product to determine its suitability. Because of numerous factors affecting results, we make no warranty of any kind, express or implied, including those of merchantability and fitness for a particular purpose. Statements in this publication shall not be construed as representations or warranties or as inducements to infringe any patent or violate any law, safety code or insurance regulation. We reserve the right to modify this document without prior notice.

Pub. No. 10025221. ARcoteX® 5326 Product Data Sheet. July 2026. English. © 2026 OCF - Original Composites & Fiberglass. All Rights Reserved.